


iQ500, Gas hob, 60 cm, Stainless steel EC6A5PB90

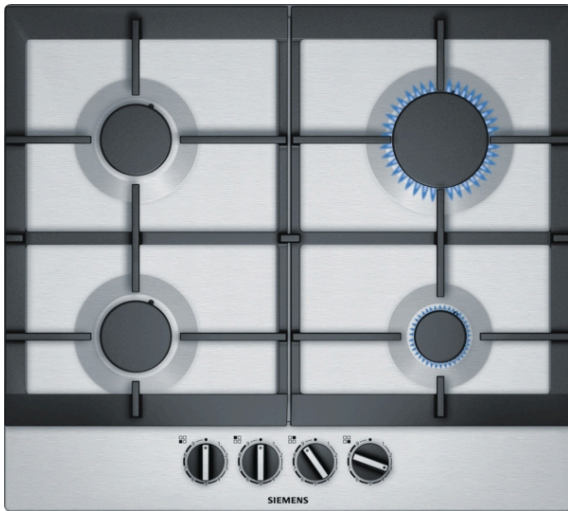

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The extremely convenient sword knob makes it easy to control and monitor the power level selected.
- ✓ The uniquely beautiful stainless-steel surface design.

Features

Technical Data

Product name/family : gas hob w integrated controls
 Construction type : Built-in
 Energy input : Gas
 Total number of positions that can be used at the same time : 4
 Type of control setting devices : sword knobs
 Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
 Width of the appliance : 582 mm
 Dimensions : 45 x 582 x 520 mm
 Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm
 Net weight : 11.336 kg
 Gross weight : 12.2 kg
 Residual heat indicator : without
 Location of control panel : Hob front
 Basic surface material : Stainless steel
 Color of surface : Stainless steel
 Color of frame : Stainless steel
 Approval certificates : CE, Eurasian
 Length of electrical supply cord : 100 cm
 EAN code : 4242003742044
 Electrical connection rating : 1 W
 Gas connection rating : 7500 W
 Fuse protection : 3 A
 Voltage : 220-240 V
 Frequency : 60; 50 Hz



iQ500, Gas hob, 60 cm, Stainless steel EC6A5PB90

Features

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner gas hob including:
 - Left front: Standard burner up to 1.75 KW (depending on gas type)
 - Left rear: Standard burner up to 1.75 KW (depending on gas type)
 - Right rear: High-speed burner up to 3 KW (depending on gas type)
 - Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Natural gas L 25 mbar (NL)
- Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
-
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

iQ500, Gas hob, 60 cm, Stainless steel
EC6A5PB90

Dimensioned drawings

