

**Serie | 2, Wall-mounted cooker hood,
90 cm, clear glass
DWA94BC50B**

**Hood with glass design: performance
combined with curved glass design to
match your kitchen.**

D



Technical Data

Typology :	Chimney
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	130
Height of the chimney (mm) :	576-897/576-1007
Height of product, without chimney (mm) :	50
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	14.675
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	365
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	64
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242005050963
Connection rating (W) :	100
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation type :	Wall-mounted

Optional accessories

- DHZ1225 : Chimney extension 1000 mm
- DHZ1235 : Chimney extension 1500 mm
- DHZ9550 : Brushed steel back panel
- DHZ9551 : Brushed steel back panel
- DWZ0DX0A0 : Standard odor filter (replacement)
- DWZ0DX0U0 : Standard recirculation kit
- DWZ0XX0J0 : Long Life recirculation kit
- DZZ0XX0P0 : Long Life odor filter (replacement)



4 242005 050963

Serie | 2, Wall-mounted cooker hood, 90 cm, clear glass DWA94BC50B

Hood with glass design: performance combined with curved glass design to match your kitchen.

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 64 dB dB*

Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 1 removable metal grease filter cassette
- Designed for wall mounted installation

Design

- Chimney extractor hood
- Mechanical

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Extraction rate in recirculation mode: Max. normal use: 198 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- Noise level in recirculation mode: Max. normal use: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 101 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 617-947 x 900 x 488 mm
- Dimensions recirculating (HxWxD): 617-1057 x 900 x 488 mm
- Dimensions recirculating with CleanAir module (HxWxD): 686 x 900 x 488 mm - mounting with outer chimney 815-1145 x 900 x 488 mm - mounting with telescopic chimney
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*


Optional accessories

- Recirculating kit DHZ1225

* In accordance with the EU-Regulation No 65/2014

**Serie | 2, Wall-mounted cooker hood, 90 cm,
clear glass
DWA94BC50B**

measurements in mm

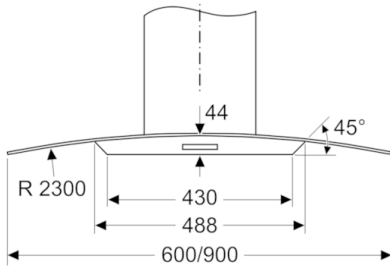

Dimensions for designing rear wall panels.
Please ensure that all dimensions are within
the tolerances. The actual dimensions must
be checked on the appliance in question.